

MT HOOD

Universal Extenders



- Extend HDMI, DVI-D or VGA signals over a single CATx cable
- Dedicated HDMI, DVI-D or VGA input and output ports. No signal conversion
- VGA sources always have priority
- Maximum HDMI, DVI-D resolution of 1920 x 1200 up to 35 meters (115 feet)
- Maximum VGA resolution of 2048 x 1536 up to 35 meters (115 feet)
- Plug and play - no software required
- Separate HDMI, DVI-D, VGA equalizer control on receiver for image quality adjustment

UNI-1-E

Universal Extender
for HDMI, DVI-D,
VGA

UNI-1-R


Universal Receiver
for HDMI, DVI-D,
VGA

UNI-1-E



- | | |
|-------------------|-----------------|
| 1 Power Indicator | 4 VGA Input |
| 2 5V DC Input | 5 CATx Link Out |
| 3 DVI/HDMI Input | |

UNI-1-R

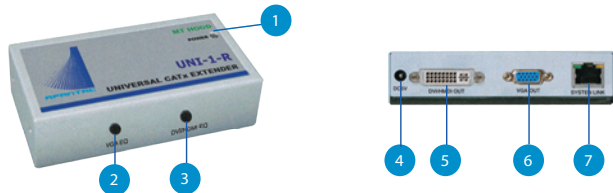

- | | |
|----------------------|-------------------|
| 1 Power Indicator | 5 DVI/HDMI Output |
| 2 VGA Equalizer | 6 VGA Output |
| 3 DVI/HDMI Equalizer | 7 System Link |
| 4 5V DC Input | |

MT HOOD
Universal Extenders

SPECIFICATIONS

MODEL	UNI-1-E	UNI-1-R
Description	Universal Extender for HDMI, DVI-D, VGA	Universal Receiver for HDMI, DVI-D, VGA
Input	1 x DVI-D (with HDMI Adapter) 1 x VGA	1 x RJ45
Accessory	HDMI to DVI Adapter	HDMI to DVI Adapter
Output	1 x RJ45	1 x DVI-D / HDMI (with HDMI Adapter) 1 x VGA
Adjustments	N/A	HDMI, DVI-D, VGA Equalizers
Resolution / Distance	HDMI, DVI-D Maximum Resolution of 1920 x 1200 up to 35 meters (115 feet) VGA Maximum Resolution of 2048 x 1536 up to 35 meters (115 feet)	
Mount	Magnetic	Magnetic
Dimensions	113 mm W x 62 mm D x 29 mm H	
Power	USB 5v or Optional 5 v 1000 mA	DC 5v 1000 mA