


MT HOOD

Conference Connect

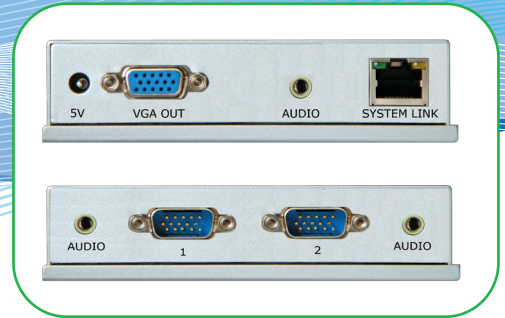

VGA-2x1-ER
VGA Extender / Receiver with 2 VGA inputs and audio support


VGA-1-Ra
VGA receiver with auto cable equalization

- Designed for conferences and meetings with multiple presenters
- AV extension and switching solution between presenters with a single click of a button
- Up to 120 VGA inputs (e.g. laptops) can share a single projector or display within a 1,000 foot (300 meter) range
- Maximum resolution up to 2048 x 1536 at up to 1000 feet (300 meters)
- Plug and play - no software required
- Packages can be scaled to meet specific meeting and conference room requirements

VGA-2x1-ER




3 1 4 2



3 5 6 3

- | | |
|---------------|--------------------|
| 1 CATx Input | 4 CATx Link Output |
| 2 5V DC Input | 5 VGA / PC Input 1 |
| 3 Audio | 6 VGA / PC Input 2 |

VGA-1-Ra




1 2 3 4

- 1 5V DC Input
- 2 VGA Output
- 3 Audio
- 4 System Link

MT HOOD Conference Connect

CONFERENCE CONNECT SYSTEM DIAGRAM

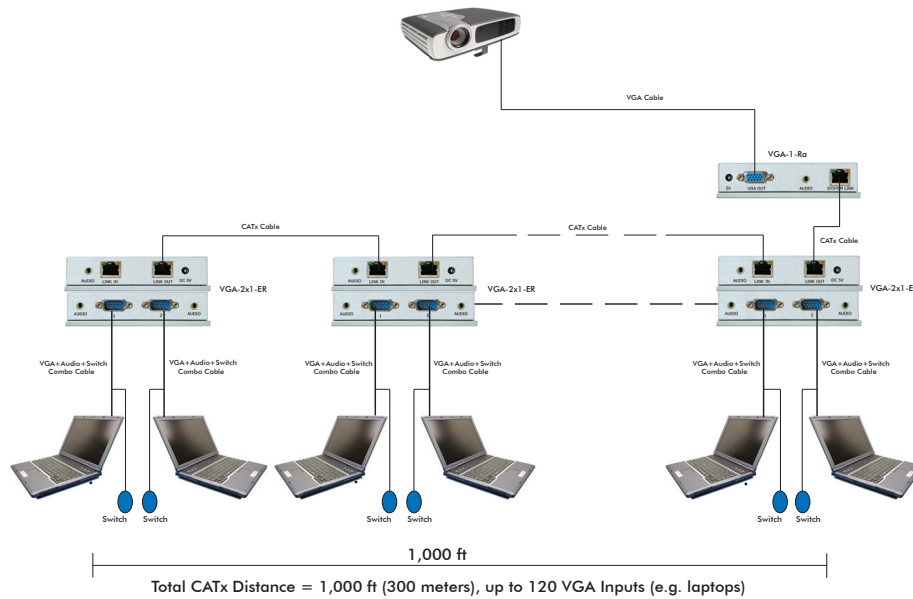

SPECIFICATIONS

MODEL	VGA-2x1-ER	VGA-1-Ra
Description	VGA Extender / Receiver with audio support	VGA Receiver with auto cable equalization
Input	2 x VGA Audio	1 x RJ45
Accessories	Combo cable VGA + Audio switch to bring source online	N/A
Output	2 x RJ45	1 x VGA Audio
Resolution / Distance	Supports resolution up to 2048 x 1536 at up to 1000 feet (300 meters)	
Mount	Magnetic	Magnetic
Dimensions	113 mm W x 62 mm D x 29 mm H	
Power	DC 5v 1000 mA	DC 5v 1000 mA