

Digital Splitter.

The V698 Digital Splitter is a passive device with a single input and two outputs. It provides a simple and cost effective method of splitting SDI, ASI or AES EBU digital signals. For multiple circuits the V697 Rack Splitter is available.

Only a very modest signal loss is incurred from the use of this module, enabling it to be used freely on all medium and short cable runs.



FEATURES

- Completely passive - no PSU
- 1 input to 2 outputs
- Cost effective signal distribution

Technical Specification

Suitable for Formats


EBU Tech 3267
ANSI T14.223
DVB ASI
AES-3 1992 Unbalanced

Serial Input

Connector BNC
Impedance 75 Nominal
Return Loss >10dB, 0.5-270MHz
Data Rate 270Mb/s

Serial Outputs (2)

Connector BNC
Impedance 75 Nominal
Return Loss >10dB, 0.5-270MHz
Data Rate 270Mb/s
Insertion Loss Approximately equivalent to 40m of Belden 8281 cable

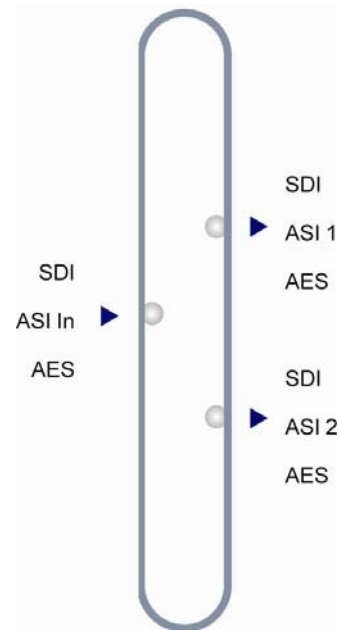

WWW.PRO-BEL.COM

UK
+44 (0) 1189 866 123

USA
+1 631 549 5159

France
+33 (0) 1 45 18 39 80

Hong Kong
+ 852 2891 9123

